



Directed Graphs




Outline and Reading (§12.4)

- ◆ Reachability (§12.4.1)
 - Directed DFS
 - Strong connectivity
- ◆ Transitive closure (§12.4.2)
 - The Floyd-Warshall Algorithm
- ◆ Directed Acyclic Graphs (DAG's) (§12.4.3)
 - Topological Sorting




Digraphs

- ◆ A **digraph** is a graph whose edges are all directed
 - Short for "directed graph"
- ◆ Applications
 - one-way streets
 - flights
 - task scheduling




Digraph Properties

- ◆ A graph $G=(V,E)$ such that
 - Each edge goes in one direction:
 - Edge (a,b) goes from a to b , but not b to a .
- ◆ If G is simple, $m \leq n*(n-1)$.
- ◆ If we keep in-edges and out-edges in separate adjacency lists, we can perform listing of in-edges and out-edges in time proportional to their size.




Digraph Application

- ◆ Scheduling: edge (a,b) means task a must be completed before b can be started

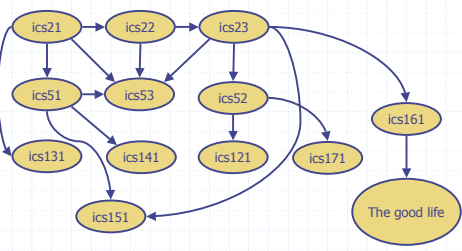

Directed DFS


- ◆ We can specialize the traversal algorithms (DFS and BFS) to digraphs by traversing edges only along their direction
- ◆ In the directed DFS algorithm, we have four types of edges
 - discovery edges
 - back edges
 - forward edges
 - cross edges
- ◆ A directed DFS starting at a vertex s determines the vertices reachable from s



Reachability



- ◆ DFS tree rooted at v : vertices reachable from v via directed paths

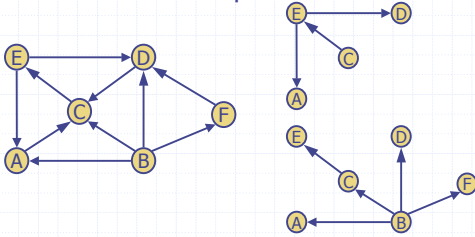


Directed Graphs

7

Strong Connectivity



- ◆ Each vertex can reach all other vertices




Directed Graphs

8

Strong Connectivity Algorithm



- ◆ Pick a vertex v in G .
- ◆ Perform a DFS from v in G .
 - If there's a w not visited, print "no".
- ◆ Let G' be G with edges reversed.
- ◆ Perform a DFS from v in G' .
 - If there's a w not visited, print "no".
 - Else, print "yes".



- ◆ Running time: $O(n+m)$.


Directed Graphs

9

Strongly Connected Components



- ◆ Maximal subgraphs such that each vertex can reach all other vertices in the subgraph
- ◆ Can also be done in $O(n+m)$ time using DFS, but is more complicated (similar to biconnectivity).

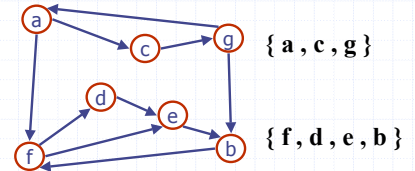


Directed Graphs

10

Transitive Closure

- ◆ Given a digraph G , the transitive closure of G is the digraph G^* such that
 - G^* has the same vertices as G
 - if G has a directed path from u to v ($u \neq v$), G^* has a directed edge from u to v
- ◆ The transitive closure provides reachability information about a digraph



Directed Graphs

11

Computing the Transitive Closure

- ◆ We can perform DFS starting at each vertex
 - $O(n(n+m))$

If there's a way to get from A to B and from B to C, then there's a way to get from A to C.



- ◆ Alternatively ... Use dynamic programming: The Floyd-Warshall Algorithm


Directed Graphs

12

Floyd-Warshall Transitive Closure



- Idea #1: Number the vertices $1, 2, \dots, n$.
- Idea #2: Consider paths that use only vertices numbered $1, 2, \dots, k$, as intermediate vertices:

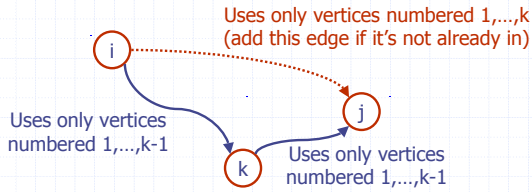

Directed Graphs

13

Floyd-Warshall's Algorithm



- Floyd-Warshall's algorithm numbers the vertices of G as v_1, \dots, v_n and computes a series of digraphs G_0, \dots, G_n
 - $G_0 = G$
 - G_k has a directed edge (v_i, v_j) if G has a directed path from v_i to v_j with intermediate vertices in the set $\{v_1, \dots, v_k\}$

```


Algorithm FloydWarshall( $G$ )
Input digraph  $G$ 
Output transitive closure  $G^*$  of  $G$ 
 $i \leftarrow 1$ 
for all  $v \in G.vertices()$ 
    denote  $v$  as  $v_i$ 
     $i \leftarrow i + 1$ 
 $G_0 \leftarrow G$ 
for  $k \leftarrow 1$  to  $n$  do
     $G_k \leftarrow G_{k-1}$ 
    for  $i \leftarrow 1$  to  $n$  ( $i \neq k$ ) do
        for  $j \leftarrow 1$  to  $n$  ( $j \neq i, k$ ) do
            if  $G_{k-1}.areAdjacent(v_i, v_k) \wedge$ 
                 $G_{k-1}.areAdjacent(v_k, v_j)$ 
            if  $\neg G_{k-1}.areAdjacent(v_i, v_j)$ 
                 $G_k.insertDirectedEdge(v_i, v_j, k)$ 
    return  $G_n$ 
    
```

- We have that $G_n = G^*$
- In phase k , digraph G_k is computed from G_{k-1}
- Running time: $O(n^3)$, assuming $areAdjacent$ is $O(1)$ (e.g., adjacency matrix)

Directed Graphs

14


Floyd-Warshall Example

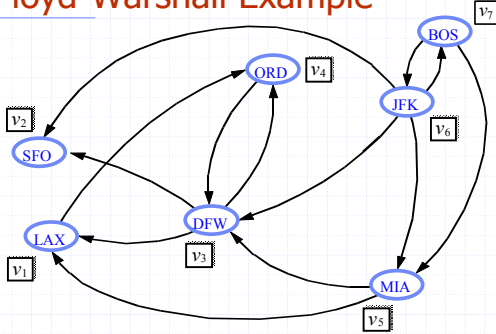

Directed Graphs

15


Floyd-Warshall, Iteration 1

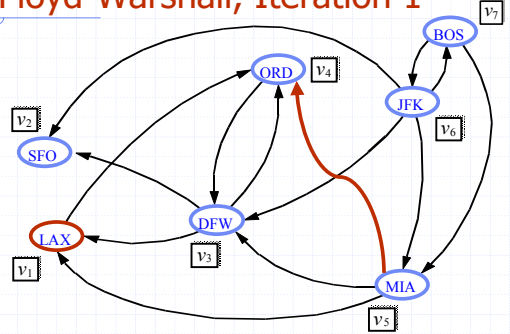

Directed Graphs

16


Floyd-Warshall, Iteration 2

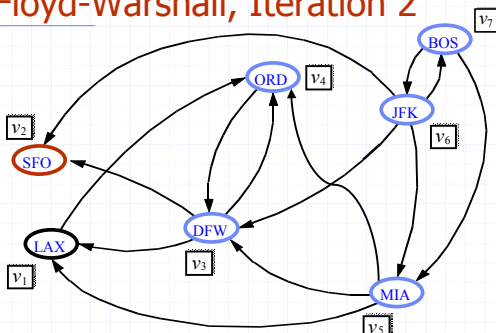

Directed Graphs

17


Floyd-Warshall, Iteration 3

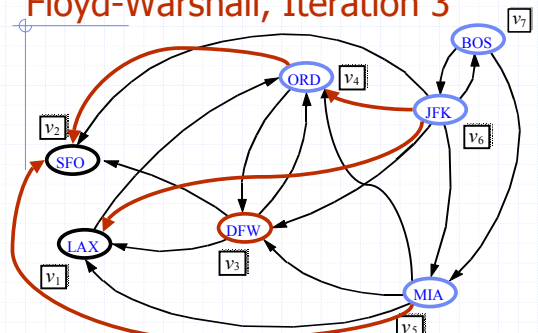

Directed Graphs

18


Floyd-Warshall, Iteration 4

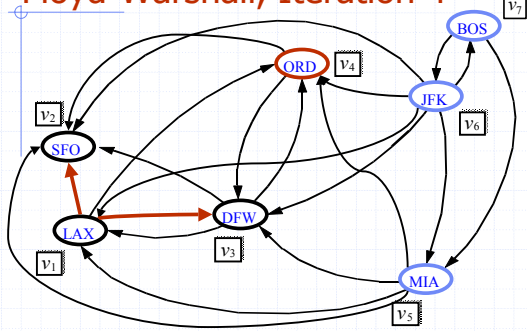

Directed Graphs

19


Floyd-Warshall, Iteration 5

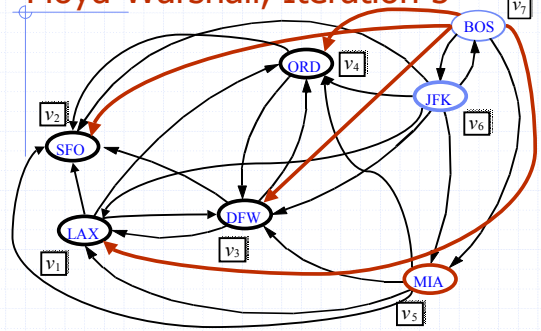

Directed Graphs

20


Floyd-Warshall, Iteration 6

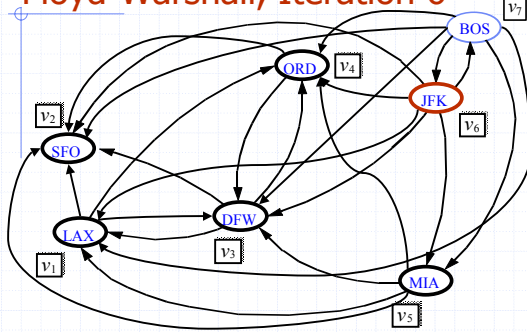

Directed Graphs

21

Floyd-Warshall, Conclusion

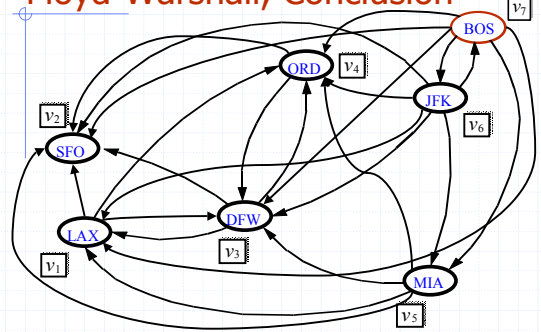

Directed Graphs

22

DAGs and Topological Ordering



- ◆ A directed acyclic graph (DAG) is a digraph that has no directed cycles
- ◆ A topological ordering of a digraph is a numbering

v_1, \dots, v_n
of the vertices such that for every edge (v_i, v_j) , we have $i < j$

- ◆ Example: in a task scheduling digraph, a topological ordering a task sequence that satisfies the precedence constraints

Theorem

A digraph admits a topological ordering if and only if it is a DAG




Directed Graphs

23

Topological Sorting

- ◆ Number vertices, so that (u,v) in E implies $u < v$

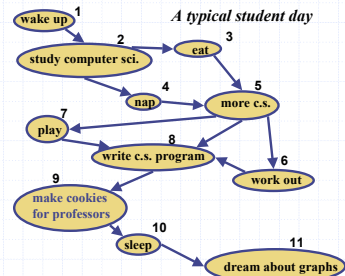

Directed Graphs

24

Algorithm for Topological Sorting

◆ Note: This algorithm is different than the one in Goodrich-Tamassia

```

Method TopologicalSort(G)
  H ← G // Temporary copy of G
  n ← G.numVertices()
  while H is not empty do
    Let v be a vertex with no outgoing edges
    Label v ← n
    n ← n - 1
    Remove v from H
    
```

◆ Running time: $O(n + m)$. How...?

Topological Sorting Algorithm using DFS

◆ Simulate the algorithm by using depth-first search

```


Algorithm topologicalDFS(G)
  Input dag G
  Output topological ordering of G
  n ← G.numVertices()
  for all u ∈ G.vertices()
    setLabel(u, UNEXPLORED)
  for all e ∈ G.edges()
    setLabel(e, UNEXPLORED)
  for all v ∈ G.vertices()
    if getLabel(v) = UNEXPLORED
      topologicalDFS(G, v)
    
```

```


Algorithm topologicalDFS(G, v)
  Input graph G and a start vertex v of G
  Output labeling of the vertices of G
  in the connected component of v
  setLabel(v, VISITED)
  for all e ∈ G.incidentEdges(v)
    if getLabel(e) = UNEXPLORED
      w ← opposite(v, e)
      if getLabel(w) = UNEXPLORED
        setLabel(e, DISCOVERY)
        topologicalDFS(G, w)
      else
        {e is a forward or cross edge}
        Label v with topological number n
        n ← n - 1
    
```

◆ $O(n+m)$ time.


Topological Sorting Example




Topological Sorting Example




Topological Sorting Example



Topological Sorting Example




Topological Sorting Example



Directed Graphs

31


Topological Sorting Example



Directed Graphs

32


Topological Sorting Example



Directed Graphs

33


Topological Sorting Example



Directed Graphs

34


Topological Sorting Example



Directed Graphs

35

Topological Sorting Example



Directed Graphs

36